



# Pastomaster XPL P

The technology  
that boosts  
your work.

# Pastomaster XPL P



## Pasteurization

Controlled heat treatment discovered in 1864 by French scientist Louis Pasteur to sanitize food by killing pathogenic microbes without causing the deterioration of vitamins and proteins. In other words, purifying while preserving the food's nutritional value, taste, and aroma.



## Gelato Mixes

### Intermediate Pasteurization



Choose any pasteurization temperatures between 65 °C and 95 °C.

### Low Pasteurization 65 °C



A more delicate cycle, to respect ingredient taste and texture.

### Chocolate Pasteurization 90 °C



For chocolate mixes. This cycle melts chocolate perfectly while bringing out its aroma.

### Cooling Aging



Cooling at 4 °C, storage, and aging, without heating.

### Sugar Syrup




To produce the syrup used in water-based mixes.

### Inverted Sugar



To produce the sweetener used to reduce solids without eliminating sweetness.

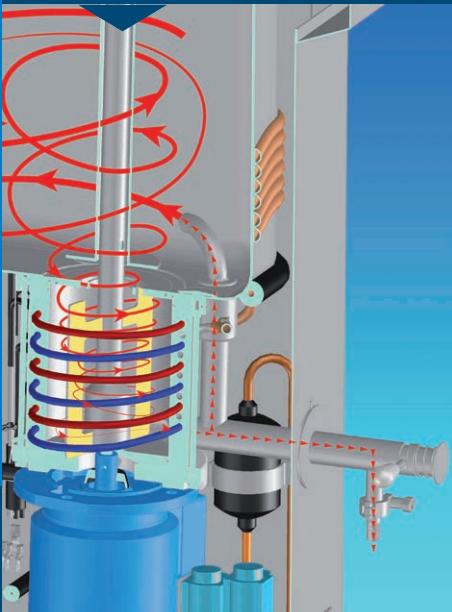


## Exchange Pump

The ingredients are mixed and pasteurized inside the exchange pump cup, which is located on the tank bottom. This exclusive, patented Carpigiani technology guarantees:

**High micronization:** the millimetric cup-beater coupling and the different mixing speeds reduce the fat globules to particularly fine sizes, from 2 to 5 microns, for a gelato that is more creamy and stable.

**Superior efficiency** allows working even with minimum batches without the risk of burning the mix. Furthermore, the original dry bain-marie system avoids product buildup.

**Cycle Times.** The thermal exchange per liter of mix, heating to 85 °C and cooling to 4 °C, is extremely rapid: less than 2 minutes on the 60 XPL P model and less than 1 minute on the 120 XPL P. With this technology, the energy consumption and the pasteurization times are directly proportional to the amount of mix being produced.

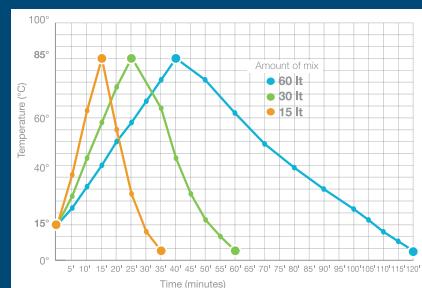

## Convenience



### Lid and exchange pump.

Thanks to the absence of a beater in the tank, when the lid is open it is possible to add ingredients while the mix continues to be blended, working in complete safety.

### ✓ Bucket shelf.


Extra made of steel. Removable for easy washing.

### ✓ Mix conveyor.

Extra kit to hygienically transfer the mix. Scan the **QR Code** on the front of the machine to access the most up to date equipment information: Instruction Manual, Carpi Care kit & Carpi Clean kit.



## Hygiene

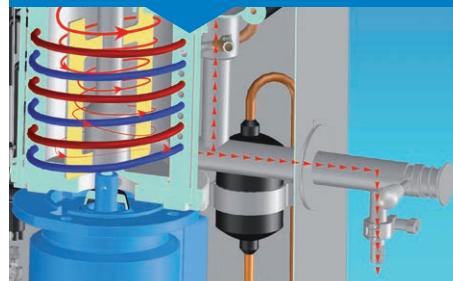

### Temperature-controlled spigot.

The mixture circulates continuously inside the spigot ensuring its correct operating temperature.

### Total cleaning.

The spigot is completely removable, washable, and can be inspected for maximum machine hygiene.

**Carpi Care kit - Carpi Clean kit:** request them from your dealer to always keep your machine hygienically perfect.

Carpi Care kit



Carpi Clean kit



## Safety



**Lid and Display.** At temperatures greater than 50 °C, to avoid the spatter of boiling liquid, the beater stops moving if the lid is lifted.


In addition, with a message the display alerts the operator that inside the machine there are heated products to help prevent improper operations with hot products.

### Blackout and Water supply cutoff:

After an electrical blackout or interruption of the water supply, if the temperature-time parameters can guarantee that the mix has not suffered the pasteurizer resumes the current program.

Otherwise it automatically starts a new full pasteurization cycle, alerting the user with a message on the display.

**✓ With TEOREMA** you can monitor the machine via internet, PC, tablet, and smartphone. Technical service is facilitated thanks to the ability to remotely perform controls and diagnostics.

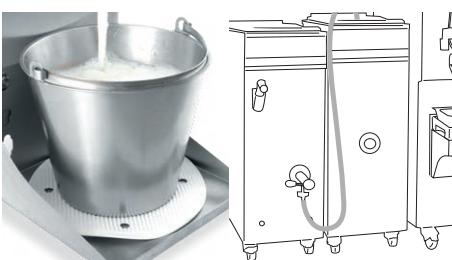

Pastomaster 60 XPL P



Pastomaster 120 XPL P



### Technical specifications

	Production		Power Supply Electrical*			Rated Power Input	Fuse	Cooling System**	Size cm at the base			Net Weight
	Min. liters	Max liters	Volts	Hz	Ph	kW	A	Water	Width	Depth	Height	kg
Pastomaster 60 XPL P	15	60	400	50	3	7	16	Water	35	86	103	162
Pastomaster 120 XPL P	30	120	400	50	3	11.2	20	Water	65	86	103	269

Production rates refer to a room temperature of 25 °C and a water temperature of 20 °C in the condenser.

\* Other voltages and cycles are available with surcharge. \*\* Also available with air cooling with surcharge.

The above dimensions and weight refer to the water cooled version.

Pastomaster XPL P machines are produced by Carpigiani with a UNI EN ISO 9001 Certified Quality System.

All specifications mentioned must be considered approximate. Carpigiani reserves the right to make any changes it deems necessary without prior notice.



Via Emilia, 45 - 40011 Anzola dell'Emilia - BOLOGNA, Italy - T. +39 051 6505111 - info@carpigiani.it

an Ali Group Company



the spirit of excellence